

IWB's



- **Features:**
- Manufactured in our New 140 sqm Purpose Built Workshop
- Stylish Extruded Side Mounted Terminal Box allowing Increased Access
- Constructed from 48 x 5mm Aluminium Barrel to BS 7906-1:2003
- Available with Physical Segregation for Data Connections to 17th Edition Regulations
- Tough Injection Moulded ABS Socket Boxes
- Full Range of Socket Outlets in Stock
- Tri-rated Cable Throughout
- **Built and Tested to the following standards:**
- Low Voltage Directive (2006/95/EC)
- EN60065
- BS EN60059
- BS 7906-1:2003
- **Safe Working Loads:**
- 78Kg Uniformly Distributed between 2 Metre Suspension Points
- 39Kg Point Load between 2 Metre Suspension Points



Part Number
Sample

L 12 10 3 0


L = Prefix

12 = Bar Length
02 = Min
18 = Max

10 = Socket Qty
03 = Min
18 = Max

3 = 13 amp Skts
5 = 15 amp Skts
6 = 16 amp Skts

0 = Silver
1 = Black

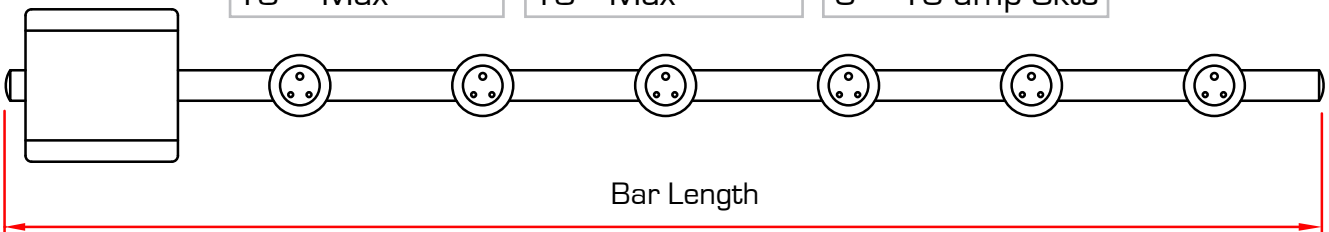

Doughty Engineering Ltd

Crow Arch Lane, Ringwood, Hampshire, BH24 1NZ
Tel: +44 (0) 1425 478961 Fax: +44 (0) 1425 474481
sales@doughty-engineering.co.uk www.doughty-engineering.co.uk

Due to our policy of continuous improvement Doughty Engineering Ltd reserve the right to amend these specifications without notice