


## PROLYTE MAMMOTH TRUSS

The Prolyte M145RV Mammoth truss is the biggest truss ever constructed from aluminium and placed the engineering team for several challenges. The final design of this truss not only reflects the Prolyte philosophy of making user-friendly products, it also proves the unrivalled technological knowledge and experience Prolyte has gained over the years.

### Technical Specifications:

M145RV Mammoth truss measurements	780mm wide, 1450mm height
Length	2400mm and 4800mm sections
Main tubes (chords)	100 x 8mm
Braces	60x60x3 (side), 50x4 (bottom)
Coupling system	pin fork connection
Weight	52kg/m
Allowable bending moment	580kNm
Max. Allowable CPL	6400kg on 30m. Span

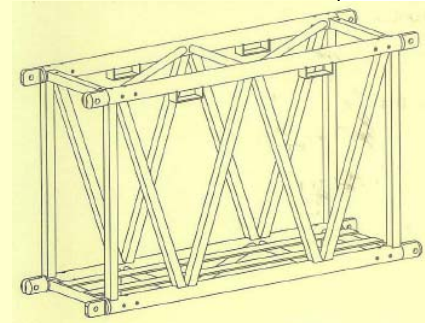


## STAGE DEX EASY FRAME C

The Stage DEX EASY FRAME C can be used for flat stages as well as raised platforms or bleachers. This makes the initial investment very economic, since only one system has to be purchased for several types of use. The very quick assembly also diminishes building times. The free corridors, which can be created under the stage, allow for handy storage space for your empties or are the ideal location for dimmer city or other use.

### Technical Specifications:

Max. Horizontal loading	750 kg/m <sup>2</sup>
Max. Lateral loading	10% of horizontal load
Max. Stage height	270cm, Stage height variable in steps of 10cm
Min. Stage height	100cm, Stage height variable in steps of 10cm
Length	Standard 100cm and 200cm sections

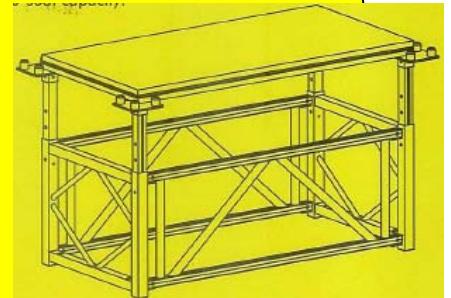

## DOLLY for PROLYTE 30D TRUSS

The PRO-WHEELS 30D dolly consist of a set of 2 small dollies, used in combination with a hard foam stacking form, that keeps the trusses safely secured and in place. Stacked up to 8 truss rows high, the dollies and truss are fixed with a set of ratchet straps. It is ideal for any rental job and can easily be store until they are needed during load out of the show.

### Technical Specifications:

Dolly	Zinc plated dolly, incl. non-braked wheels
Measurement	530mm wide
Boomerang Carrier	Hard foam, anti-skidding carrier
Ratchet	Endless ratchet strap, 6m length and 50mm

### System Description

Each PRO-WHEELS-30D dolly consist of:

2-x	ACC-521	Zinc plated dolly, incl. non-braked wheels
2-14 x	ACC-525	Hard foam, anti-skidding boomerang Carrier
2 x	RA-2T-600-OE	Endless ratchet strap, 6m. length

